

DataSheet

GB | ACOUSTICS

Product name PET FeltPanel | Wave

Composition 100% polyester fibre, of which a minimum of 75% is post consumer recycled polyester fibre *(from PET bottle-flake)*

Standards ISO 900, ISO 14001 Quality and Environmental Management Systems. ROHS, SVHC, REACH

Dimensions 2400*1200mm, 2400*820mm, 2400*1150mm, 2400*1120mm
(+/-3 mm) or customised

Fire rating EN13501-12007 - Class B
BS 476 Part 7 class - 1Y


Thickness 9mm *(+/-1mm)* 12mm *(+/-1mm)*

Density 2000gsm *(+/-100g)* 2400gsm *(+/-100g)*


Colour *(refer to chart below)* 60 *(available)* 60 *(available)*

NRC 0.40 *(0.25aw)* 0.40 *(0.30aw)*
0.80 *50mm cavity*


Wave A
2400*1200*8/11

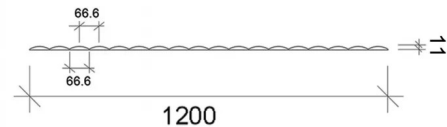


Wave B
2400*820*38mm

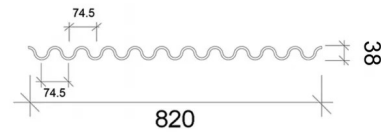

Wave C
2400*1150*20mm

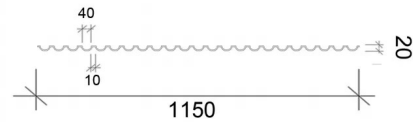

Wave D
2400*1120*26mm

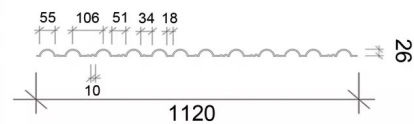

Size: 9mm | 12mm

